

Doc. A/92
31 January 2002

ATSC Standard: Delivery of IP Multicast Sessions over ATSC Data Broadcast

Advanced Television Systems Committee
1750 K Street, N.W.
Suite 1200
Washington, D.C. 20006

The Advanced Television Systems Committee, Inc., (ATSC) is an international, non-profit membership organization developing voluntary standards for the entire spectrum of advanced television systems.

Specifically, ATSC is working to coordinate television standards among different communications media focusing on digital television, interactive systems, and broadband multimedia communications. ATSC is also developing digital television implementation strategies and presenting educational seminars on the ATSC standards.

ATSC was formed in 1982 by the member organizations of the Joint Committee on InterSociety Coordination (JCIC): the Electronic Industries Association (EIA), the Institute of Electrical and Electronic Engineers (IEEE), the National Association of Broadcasters (NAB), the National Cable Television Association (NCTA), and the Society of Motion Picture and Television Engineers (SMPTE). Currently, there are approximately 170 members representing the broadcast, broadcast equipment, motion picture, consumer electronics, computer, cable, satellite, and semiconductor industries.

ATSC Digital TV Standards include digital high definition television (HDTV), standard definition television (SDTV), data broadcasting, multichannel surround-sound audio, and satellite direct-to-home broadcasting.

Table of Contents

1. SCOPE	6
1.1 Organization	6
2. REFERENCES	7
2.1 Normative References (Normative)	7
2.2 Informative References	7
3. DEFINITIONS AND STRUCTURES (NORMATIVE)	8
3.1 Compliance Notation	8
3.2 Acronyms and Abbreviations	8
3.3 Global Terms	9
3.4 Section and Data Structure Syntax Notation	12
4. MPEG TRANSPORT IP NETWORK MODEL	13
4.1 Mapping of an IP Network	13
4.2 Mapping of Sessions	13
4.2.1 Notations	13
4.2.2 Mapping Scenarios	14
4.2.3 Identification of the Broadcast IP Network in Data Receivers	16
5. MAPPING OF IP MULTICAST SESSIONS TO PROGRAM ELEMENTS AND VIRTUAL CHANNELS .	16
5.1 Mapping to ATSC A/90 Applications	16
5.1.1 Multiple Sessions in the Same Application	16
5.1.2 Multiple Insertion Points	17
5.1.3 Conditional Access Granularity	17
5.2 Mapping to ATSC Virtual Channels	17
5.2.1 Multiple Sessions in the Same Virtual Channel	17
5.2.2 Multiple Sessions and Multiple Virtual Channels	18
6. SDP USAGE CONSIDERATIONS	18
7. DATAGRAM ENCAPSULATION	19
7.1 Introduction	19
7.2 Protocol Encapsulation	19
7.3 DSM-CC Addressable sections	19
7.4 Format of Device Identifier Fields	19
8. SERVICE ANNOUNCEMENT AND SCHEDULE	20
8.1 Introduction	20
8.2 Data Event Table (DET)	20
8.3 Data Service Descriptor	21

8.4 PID Count Descriptor	21
9. SIGNALING FOR DISCOVERY AND BINDING OF AN IP MULTICAST SERVICE	21
9.1 Introduction	21
9.2 THE MAC Address List Descriptor	22
9.2.1 Definition	22
9.2.2 Use of this Descriptor in the Data Service Table (DST)	22
9.3 Single IP Multicast Service in a Single Virtual Channel	22
9.3.1 Case of a Single IPM Program Element	22
9.3.2 Case of Multiple IPM Program Elements	23
9.3.3 Taps and Application	23
9.4 Multiple IP Multicast Sessions on a Single Virtual Channel	23
9.4.1 Single Application	23
9.4.2 Multiple Applications	23
9.5 Multiple IP Multicast Services on Multiple Virtual Channels	24
10. BUFFER MODEL.....	24
11. SCRAMBLING OF MAC LAYER MULTICAST ADDRESSES.....	24
11.1 Payload Scrambling	24
11.2 Device Identifier Scrambling	24
12. ACQUISITION PROCEDURE	25
13. PSIP VIRTUAL CHANNEL TABLE (VCT).....	28
14. NETWORK RESOURCE TABLE (NRT).....	28
15. AN EXAMPLE USING SMPTE DECLARATIVE DATA ESSENCE (DDE).....	28
15.1 DSMCC Addressable Section	29
15.2 Data Event Table (DET)	30
15.3 Data Service Descriptor	31
15.4 PID Count Descriptor	31
15.5 Compatibility Descriptor	32
15.6 Data Service Table (DST)	32
16. IMPLEMENTATION INFORMATION ON THE IP NETWORK MODEL.....	33
17. IP MULTICAST BUFFER MODEL.....	34
18. MAC ADDRESS LIST DESCRIPTOR (NORMATIVE).....	37
19. COMPARATIVE DESCRIPTION OF IP MULTICAST IN TERRESTRIAL AND CABLE.....	38
19.1 Encapsulation	39
19.2 Signaling	39

Index of Figures and Tables

Figure 12.1 PSI and PSIP table hierarchy used for the announcement and signaling of data services carrying IP Multicast sessions in the ATSC environment.	26
Figure 17.1 Application Buffer Model for the acquisition of IP Multicast data.	35
Figure 19.1 Network models for ATSC and DVS-311.	40
Figure 19.2 Example of a PMT that includes streams with addressable sections (stream type of 0x0D).	41
Figure 19.3 Example of a DST describing three applications, two of which carry IP Multicast streams. In this case, two networks exist in the same MPEG-2 program.	42
Table 15.1 DSMCC_addressable_section Structure	29
Table 15.2 Data Event Table Section	30
Table 15.3 Data Service Descriptor	31
Table 15.4 PID Count Descriptor	31
Table 15.5 Compatibility Descriptor	32
Table 15.6 data_service_table_bytes Structure	32
Table 18.1 Definition of the MAC_Address_List_descriptor Structure	37
Table 18.2 Definition of the pdu_size Field	38
Table 18.3 Definition of the encapsulation_type Field	38
Table 19.1 Bit-Field Differences in the Encapsulation Methods of ISO/ATSC and DVB	39

ATSC Standard:

Delivery of IP Multicast Sessions over ATSC Data Broadcast

1. SCOPE

This standard specifies the delivery of IP Multicast sessions, the delivery of data for describing the characteristics of a session, and usage of the ATSC A/90 Data Broadcast Standard for IP Multicast.

This document¹ defines a Standard for the asynchronous transmission of Internet Protocols (IP) specifically including multicast addressing compatible with the ATSC A/90 Data Broadcast Standard. This Standard assumes the use of Session Description Protocol (SDP) as an integral part of the IP Multicast-based Data Broadcast service. It is strongly suggested that normative clauses that do not directly involve SDP be retained in the case of IP Multicast-based Data Broadcast services that do not include any SDP data, such as would be used for non-session-based IP Multicast.

This document focuses solely on the carriage of all information using the DSMCC_addressable_section. Synchronous and synchronized carriage of IP Multicast datagrams are not addressed by this document.

1.1 Organization

Entire normative sections of this document are identified as such with the parenthetical “(Normative)”. Other sections may contain normative clauses that are identified by use of the preamble “Normative Clause” and by distinctive formatting of the normative clause. All remaining text is provided for informational purposes only.

The document is organized as follows:

- **Section 1**—Provides this general introduction.
- **Section 2**—Lists references and applicable documents.
- **Section 3**—Provides a definition of terms, acronyms, abbreviations, syntax formats, and code points for this document.
- **Section 4**—Specifies the IP Network model in an ATSC Transport Stream.
- **Section 5**—Specifies the rules for mapping IP Multicast sessions to ATSC Virtual Channels.
- **Section 6**—Specifies usage of the Session Description Protocol.
- **Section 7**—Specifies the encapsulation for IP Multicast datagrams.
- **Section 8**—Specifies the schedule announcement of an IP Multicast data service.

¹ NOTE: The user’s attention is called to the possibility that compliance with this standard may require use of an invention covered by patent rights. By publication of this standard, no position is taken with respect to the validity of this claim, or of any patent rights in connection therewith. The patent holder has, however, filed a statement of willingness to grant a license under these rights on reasonable and nondiscriminatory terms and conditions to applicants desiring to obtain such a license. Details may be obtained from the publisher.

- **Section 9**—Specifies the receiver discovery and binding mechanisms for an IP Multicast service.
- **Section 10**—Illustrates the application buffer model of an IP Multicast service.
- **Section 11**—Describes options for the scrambling of IP Multicast streams.
- **Section 12**—Provides an overview for how an IP Multicast service may be acquired.
- **Section 13**—Describes the use of the PSIP Virtual Channel Table.
- **Section 14**—Describes the use of the Network Resources Table.
- **Section 15**—Describes an example of using this standard for SMPTE declarative data essence applications.
- **Section 16**—Provides additional information about the IP network model in an ATSC Transport Stream.
- **Section 17**—Describes the IP Multicast application buffer model.
- **Section 18**—Provides the syntax and semantics of the MAC_Address_List_descriptor.
- **Section 19**—Provides a comparative description of IP Multicast support in terrestrial and cable environments.

2. REFERENCES

2.1 Normative References (Normative)

The following documents are normative for this Standard:

- 1) ATSC A/90, “ATSC Data Broadcast Standard,” July 26, 2000.
- 2) ATSC A/65A, “Program and System Information Protocol for Terrestrial Broadcast and Cable,” May 31, 2000.
- 3) IETF RFC 2327, “SDP: Session Description Protocol,” April 1998.
- 4) IETF RFC 1112, “Host Extensions for IP Multicasting,” August 1989.
- 5) IETF RFC 1700, “Assigned Numbers,” October 1994.
- 6) IETF RFC 2974, “Session Announcement Protocol,” October 2000.

2.2 Informative References

The following documents are informative for this Standard²:

- 7) ATSC A/70, “Conditional Access System for Terrestrial Broadcast and Amendment No. 1,” July 17, 1999.
- 8) SMPTE 357M, “Declarative Data Essence, IP Multicast Encapsulation.”
- 9) IETF RFC 2365, “Administratively Scoped IP Multicast,” July 1998.
- 10) ISO/IEC 13818-6:1998/Amd.1:2000(E) — “Additions to support data broadcasting.”
- 11) SCTE DVS 311r6³, “IP Multicast for Digital MPEG Networks,” March 2002.

² Note that this listing of informative references in no way changes the document’s status where it is required to be normative in other ATSC standards.

³ SCTE work in process.

3. DEFINITIONS AND STRUCTURES (NORMATIVE)

3.1 Compliance Notation

As used in this document, “*shall*” denotes a mandatory provision of the standard. “*Should*” denotes a provision that is recommended but not mandatory. “*May*” denotes a feature whose presence does not preclude compliance, that may or may not be present at the option of the implementer.

All sections of this document are informative, unless otherwise specifically indicated with the heading “Normative Clause” or which contain the word “Normative” in parenthesis in the section title.

3.2 Acronyms and Abbreviations

The following acronyms and abbreviations are used within this specification:

ATSC	Advanced Television Systems Committee
bslbf	bit serial, leftmost bit first
CRC	cyclic redundancy check
DDE	declarative data essence
DEB	data program element buffer
DET	data event table
DSM-CC	digital storage media command and control
DST	data service table
EIT	event information table
ETM	extended text message
ETT	extended text table
FRAGnkj	IP fragmentation buffer for fragment identifier j , multicast address k , in program element n .
IETF	Internet Engineering Task Force
IP	Internet Protocol
IPM	IP Multicast
IPGRMBnk	IP datagram buffer for k th IP Multicast address in the n th program element
ITU	International Telecommunication Union
MAC	media access control
MPE	multi-protocol encapsulation
MPEG	Moving Picture Experts Group
MTU	maximum transmission unit
MS	media stream
NRT	network resources table
NTP	network time protocol
PAT	program association table

PDU	protocol data unit
PES	packetized elementary stream
PID	packet identifier
PMT	program map table
PSIP	program and system information protocol
RFC	request for comments
SAP	session announcement protocol
SB_n	smoothing buffer for the <i>n</i> th program element
SCTE	Society of Cable Telecommunications Engineers
SDP	session description protocol
SDF	service description framework
SLD	service location descriptor
SMPTE	Society of Motion Picture and Television Engineers
TB_n	transport buffer for the <i>n</i> th program element
TS	transport stream
TTL	time to live
uimsbf	unsigned integer, most significant bit first
nbomsbf	network byte order, most significant bit first
UDP	user datagram protocol
UDPN_{kji}	UDP buffer for port <i>i</i> , fragment identifier <i>j</i> , IP multicast address <i>k</i> , in program element <i>n</i> .
VCT	virtual channel table

3.3 Global Terms

The following terms are used throughout this document:

ATSC Advanced Television Systems Committee. The committee responsible for the coordination and development of voluntary technical standards for advanced television systems.

bit rate The rate at which the compressed bit stream is delivered from the channel to the input of a decoder.

bps bits per second.

byte-aligned A bit in a coded bit stream is byte-aligned if its position is a multiple of 8-bits from the first bit in the stream.

CRC The cyclic redundancy check used to verify the correctness of the data.

data element A self-contained subset of a data Program Element.

data receiver Any device capable of receiving and consuming data carried on an MPEG-2 transport stream.

data service A collection of scheduled applications and associated data Program Elements as signaled in one Data Services Table. A data service is characterized by a profile and level.

- datagram** A datagram is the fundamental protocol data unit in a packet-oriented data delivery protocol. Typically, a datagram is divided into header and data areas, where the header contains full addressing information (source and destination IP addresses) with each data unit. Datagrams are most often associated with connectionless network and transport layer services.
- data source** The provider of data that is being inserted into the MPEG-2 transport stream.
- decoded stream** The decoded reconstruction of a compressed bit stream.
- decoder** An embodiment of a decoding process.
- decoding (process)** The process defined in the Digital Television Standard that reads an input coded bit stream and outputs decoded pictures, audio samples, or data objects.
- elementary stream (ES)** A generic term for one of the coded video or coded audio bit streams. One elementary stream is carried in a sequence of PES packets with one and only one stream_id.
- encoding (process)** A process that reads a stream of input pictures or audio samples and produces a valid coded bit stream as defined in the Digital Television Standard.
- event** A collection of elementary streams with a common time base, an associated start time, and an associated end time. An event is equivalent to the common industry usage of “TV program.”
- forbidden** This term, when used in clauses defining the coded bit stream, indicates that the value shall never be used. This is usually to avoid emulation of start codes.
- IP multicast application buffer** The buffer following the Smoothing Buffer of an MPEG-2 Program Element of stream_type 0x0D as defined in [1]. The purpose of this buffer is to collect only the IP Multicast data bytes out of the Smoothing Buffer and to re-assemble them into complete datagrams.
- IP multicast data stream** A collection of IP packets with the same IP Multicast address and port number.
- IPM program element** An MPEG-2 Program Element of stream_type 0x0D that carries IP Multicast datagrams in DSM-CC addressable sections.
- IP multicast service** The portion of an A/90 Data Broadcast service comprising the IP Multicast sessions and their announcements and descriptions.
- IP multicast virtual channel** An ATSC virtual channel including an IP Multicast service. The virtual channel may include other video and audio elementary streams.
- kbps** 1,000 bits per second.
- maximum transmission unit** The largest amount of data that can be transferred in a single unit across a specific physical connection. When using the Internet Protocol, this translates to the largest IP datagram size allowed.
- Mbps** 1,000,000 bits per second.
- MPEG** Refers to standards developed by the ISO/IEC JTC1/SC29 WG11, *Moving Picture Experts Group*. MPEG may also refer to the Group.
- MPEG-2** Refers to the collection of ISO/IEC standards 13818-1 through 13818-6.

- multiplexor (mux)** A physical device that is capable of inserting MPEG-2 transport stream packets into and extracting MPEG-2 transport stream packets from an MPEG-2 transport stream.
- multiprotocol encapsulation** The encapsulation or splitting of datagrams in addressable sections.
- packet** A packet is a set of contiguous bytes consisting of a header followed by its payload.
- packet identifier (PID)** A unique integer value used to associate Program Elements of a program in a single or multi-program transport stream.
- payload** Payload refers to the bytes following the header byte in a packet.
- program** A collection of Program Elements. Program Elements may be elementary streams. Program Elements need not have any defined time base; those that do have a common time base and are intended for synchronized presentation. The term *program* is also used in the context of a “television program” such as a scheduled daily news broadcast. In this specification the term “event” is used for the latter to avoid ambiguity.
- program element** A generic term for one of the elementary streams or other data streams that may be included in an ISO/IEC 13818-1 (MPEG-2) Program. The MPEG-2 Transport Stream packets conveying a Program Element are referenced by a unique PID value in the MPEG-2 Program.
- program specific information (PSI)** PSI consists of normative data which is necessary for the demultiplexing of transport streams and the successful regeneration of programs.
- profile** A defined subset of data delivery characteristics. This differs from the definition provided in ISO/IEC 13818-2.
- PSIP** Program and System Information Protocol is a collection of tables describing virtual channel attributes, event features, and other information [2].
- reserved** This term, when used in clauses defining the coded bit stream, indicates that the field may be used in the future for Digital Television Standard extensions. All reserved bits shall be set to “1”.
- SDP announcement stream** A collection of Session Description Protocol datagrams transmitted on a given IP Multicast address and pertaining to the same sessionID.
- SDP stream** The collection of one or more SDP announcement streams.
- section** A data structure comprising a portion of an ISO/IEC 13818-1 or ISO/IEC 13818-6-defined table, such as the Program Association Table (PAT), Conditional Access Table (CAT), Program Map Table (PMT), or DSMCC section. All sections begin with the `table_id` and end with the `CRC_32` field, and their starting points within a packet payload are indicated by the `pointer_field` mechanism defined in the ISO/IEC 13818-1 International Standard.
- service description framework** The information conveyed in the Program Element and providing the Data Service Table and optionally the Network Resource Table of a single data service.
- session** A collection of IP Multicast data streams bound by a common announcement and description. Announcement and description protocols are defined in IETF RFC 2974 and IETF RFC 2327 respectively.

session announcement This term is defined explicitly in RFC2327 and reproduced here for convenience. A session announcement is a mechanism by which a session description is conveyed to users in a proactive fashion, i.e., the session description was not explicitly requested by the user.

session description Information used to announce and discover a session, which may include session identification, session version, name, start and end times, and other information.

stream An ordered series of bytes. The usual context for the term *stream* is the series of bytes extracted from Transport Stream packet payloads which have a common unique PID value (e.g., video PES packets or Program Map Table sections).

stream data A stream is a data object which has no specific start or end. The decoding system may need only a small fraction of the total data to activate a given application. An example includes stock ticker services.

table The collection of re-assembled sections bearing a common version number.

table instance Tables are identified by the `table_id` field. However, in cases such as the Data Information Table, several instances of a table are defined simultaneously. All instances have the same PID and `table_id` but different `table_id_extension`.

transport stream Refers to the MPEG-2 Transport Stream syntax for the packetization and multiplexing of video, audio, and data signals for digital broadcast systems.

transport stream packet header The leading fields in a Transport Stream packet up to and including the `continuity_counter` field.

virtual channel A virtual channel is the designation, usually a number, that is recognized by the user as the single entity that will provide access to an analog TV program or a set of one or more digital elementary streams. It is called “virtual” because its identification (name and number) may be defined independently from its physical location.

3.4 Section and Data Structure Syntax Notation

Tables defined in this standard conform to the generic private section syntax defined in ISO/IEC 13818-1 (MPEG-2 Systems) and the DSM-CC Addressable section format defined in [10]. This document contains symbolic references to syntactic elements. The notation used is distinctive to aid the reader in recognizing elements that are the same as they are in referenced standards. These references are typographically distinguished by the use of a different font (e.g., *restricted*), may contain the underscore character (e.g., `sequence_end_code`) and may consist of character strings that are not English words (e.g., `dynrng` or `thisIsString`).

reserved—Fields in this Standard marked “reserved” shall not be assigned by the user, but shall be available for future use. Decoders are expected to disregard reserved fields for which no definition exists. Each bit in the fields marked “reserved” shall be set to one until such time as they are defined and supported.

user_private—Indicates that the field is not defined within the scope of this Standard. The owner of the field, and hence the entity defining its meaning, is derived via its context within a message.

zero—Indicates that the bit or bit field shall have the value zero.

4. MPEG TRANSPORT IP NETWORK MODEL

The purpose of this section is to define a model whereby standard IP network terminology and concepts can be applied to transmission of IP Multicast services in an ATSC Transport Stream. When creating, inserting, and transporting IP packets through an ATSC Transport Stream, rules need to be established to define what constitutes a network or sub-network. This is critical for all implementations, as there is the strong potential for IP address conflicts without such rules.

4.1 Mapping of an IP Network

Normative Clause

In an ATSC Transport Stream, the collection of Program Elements referenced in a single ATSC A/90 Application shall be considered as a distinct IP Network. More specifically, when making routing policies and IP address scoping policies, it is the collection of Taps in an ATSC A/90 Application that shall be viewed as the Network.

Consequently, in a given ATSC A/90 Application, a receiver can safely assume that there is no collision among the IP Multicast addresses encountered in the IP datagram headers.

Since an ATSC A/90 Application may reference one or multiple MPEG-2 Program Elements of stream_type 0x0D, the mapping of an IP Network onto an ATSC A/90 Application may be done such that the streams of an IP Multicast service may all be conveyed in either a single or multiple Program Elements. In one extreme case, the entire IP Multicast service is conveyed in one Program Element, and this single Program Element alone makes up the IP Network. In another extreme case, the IP Multicast service is divided up among multiple Program Elements that are all part of the same ATSC A/90 Application, and then this collection of Program Elements makes up the IP Network.

4.2 Mapping of Sessions

The purpose of this section is to document various cases that may be encountered when an ATSC Virtual Channel includes one or more IP Multicast sessions. For the sake of simplicity, the documented examples involve two distinct IP Multicast sessions only. The concepts documented in this section can be quickly generalized to cases involving more sessions and more media streams.

Normative Clause

An IP Multicast session shall be announced by means of the Session Description Protocol (SDP) [3]. The Session Announcement Protocol (SAP) [6] shall be used to encapsulate the SDP protocol in UDP datagrams.

4.2.1 Notations

The following notation is used to reference particular IP Multicast streams. The terms defined here refer to two distinct sessions, Session 1 and Session 2. Each session is assumed to have a distinct sessionID field value in the typical case, but there are some circumstances where this may not be true. Furthermore, the term “IP Multicast address” refers to the Internet Protocol address and port as specified in the destination address field of the IP packet header and UDP datagram header respectively.

- **SDP1 and SDP2:** Session Description Protocol streams of session 1 and 2, respectively. The IP Multicast address for SDP1 and SDP2 may be identical, but the sessionID field values are not.
- **MS11 and MS12:** IP Multicast Media stream 1 and IP Multicast Media stream 2 for session 1.
- **MS21 and MS22:** IP Multicast Media stream 1 and IP Multicast Media stream 2 for session 2.
- **PID1 through PID6:** PID values associated to six different Program Elements of stream_type 0x0D.

4.2.2 Mapping Scenarios

The following 8 scenarios are examples of various strategies that may be adopted for transmitting an IP Multicast service in an ATSC Virtual Channel. Each scenario documents how two distinct SDP sessions can be conveyed in an ATSC virtual channel. Each scenario utilizes a certain number of MPEG-2 Program Elements. Selection of one scenario over another may be driven by the need to improve session discovery, by latency considerations, bandwidth allocation, insertion point in the distribution, or by other implementation factors.

Case 1

PID1 conveys SDP1 MS11 MS12 SDP2 MS21 MS22

In this case, one Program Element conveys all the IP Multicast datagrams. By design, the Program Element referenced by PID1 is part of a single ATSC A/90 Application and the IP Network is confined to a single Program Element.

Case 2

PID1 conveys SDP1 MS11 MS12

PID2 conveys SDP2 MS21 MS22

In this case, each IP Multicast session is conveyed in a distinct Program Element. The sessions may be part of the same ATSC A/90 Application or they may each belong to a separate ATSC A/90 Application. In the latter scenario, each Program Element represents a distinct IP Network.

Case 3

PID1 conveys SDP1

PID2 conveys MS11 MS12

PID3 conveys SDP2

PID4 conveys MS21 MS22

In this case, Program Elements referenced by PID1 and PID2 carry datagrams of the same IP Multicast session and therefore they need to belong to the same ATSC A/90 Application. For the same reason PID3 and PID4 must belong to the same application. With these constraints, the two alternatives for encapsulation include: 1) setting up a single application with both sessions included, or 2) setting up two separate applications one for each session. Depending on the selected alternative, the result will be either one or two IP networks respectively.

Case 4

PID1 conveys SDP1 SDP2

PID2 conveys MS11 MS12

PID3 conveys MS21 MS22

In this case, one Program Element (referenced by PID1) conveys the datagrams of all the IP Multicast announcement streams. By design, the Program Element PID1 and the Program Elements PID2 and PID3 must belong to a single ATSC A/90 Application.

Case 5

PID1 conveys SDP1 SDP2

PID2 conveys MS11 MS12 MS21 MS22

In this case, one Program Element conveys the datagrams of all the IP Multicast announcement streams. The other Program Element conveys the datagrams of all the IP Multicast Media streams. By design, the Program Element PID1 and the Program Elements PID2 must belong to a single ATSC A/90 Application, thus resulting in a single IP network where no IP address collisions exist.

Case 6

PID1 conveys SDP1

PID2 conveys MS11

PID3 conveys MS12

PID4 conveys SDP2

PID5 conveys MS21

PID6 conveys MS22

Program Elements referenced by PID1, PID2 and PID3 must belong to the same ATSC A/90 Application, and similarly for PID4, PID5, and PID6. Two implementation alternatives exist in this case. Either the two sessions are included in only one application, or two separate ATSC A/90 applications are used. Depending on the selected alternative, the result will be one or two IP networks respectively.

Case 7

PID1 conveys SDP1 SDP2

PID2 conveys MS11

PID3 conveys MS12

PID4 conveys MS21

PID5 conveys MS22

In this case, one Program Element conveys the datagrams of all the IP Multicast announcement streams. By design, the Program Element referenced by PID1 and the Program Elements referenced by PID2, PID3, PID4, and PID5 must belong to a single ATSC A/90 Application.

Case 8

PID1 conveys SDP1

PID2 conveys SDP2

PID3 conveys MS11 MS12 MS21 MS22

In this case, the IP Multicast session description streams are conveyed in distinct Program Elements and the IP Multicast Media streams pertaining to all sessions are conveyed in the same Program Element. In this case both sessions must belong to the same ATSC A/90 Application, thus resulting in a single IP network where IP address collisions do not exist.

4.2.3 Identification of the Broadcast IP Network in Data Receivers

Normative Clause

The value of the DST app_id_length field shall be 2 or greater. The meaning of the DST app_id_description field shall be as specified in ATSC A/90 [1], and the value shall be set to 0x0002. The app_id_description and app_id_bytes fields shall uniquely identify the ATSC A/90 Application globally in space and time. When app_id_description is set to 0x0002, the app_id_bytes shall be set to the binary representation of the NTP time stamp as recommended in [3] for sessionID.

As a result, receivers can use the app_id_description and app_id_bytes fields of an ATSC A/90 Application to identify uniquely the IP network associated with this application. More specifically, a receiver may use these fields to assign and manage the local IP address of the Broadcast Network Interface (single network adaptor) that gets associated with each ATSC A/90 Application. Multiple applications define multiple networks resulting in a multi-home scenario.

Note that the app_id_byte field may be set to the value of the sessionID field used in an IP Multicast Service SDP record.

5. MAPPING OF IP MULTICAST SESSIONS TO PROGRAM ELEMENTS AND VIRTUAL CHANNELS

Mapping of one or multiple IP Multicast sessions onto an ATSC Transport Stream needs to take several factors into consideration.

The first consideration is the mapping of the IP Multicast sessions to one or multiple ATSC A/90 Applications. Different criteria are listed to guide content providers in identifying the best method. The second consideration deals with the announcement of the IP Multicast session announcement. This consideration allows content providers to decide whether one or multiple ATSC Virtual Channels should be used.

5.1 Mapping to ATSC A/90 Applications

5.1.1 Multiple Sessions in the Same Application

The insertion of multiple sessions in the same application (at either one or multiple entry points in the distribution chain) requires careful management to avoid IP address collisions if these sessions overlap in time. The management functions may be performed through cooperative authoring or instead, they may be applied in real time using IP address re-mapping.

The IP Multicast specifications for cable require having one IP network per virtual channel [11]. Consequently, if compatibility becomes a desired design premise, then all sessions can be embedded in a single application. Moreover, this application can be the only IP Multicast application in the MPEG-2 Program.

In one extreme case, all sessions may be embedded in a single Program Element as a method to reduce the number of PID filters required in a receiver. In the other extreme case, every session announcement (SDP) and every media stream are conveyed over separate Program Elements. The advantage of the latter is that once the required session is discovered, selective retrieval of media streams may be performed by direct PID filtering.

Receivers that detect IP Multicast streams may have to parse the associated streams in search of all possible SDP announcements. Notice that the signaling in the DST may not give enough information on how many sessions are running concurrently. Receivers that know a-priori the IP address of the particular multicast sessions of interest will use the MAC Address List descriptor and the Tap selector structures in the DST to pinpoint the collection of PID values to use for the PID filters.

5.1.2 Multiple Insertion Points

When sessions are inserted in multiple entry points of the distribution chain, IP address management may become a burden. In such a case, the inserted IP Multicast sessions may be mapped to different applications in the same virtual channel. Cases 2, 3, and 6, described in the previous section, are typical examples of this behavior.

5.1.3 Conditional Access Granularity

The ATSC Conditional Access standard [7] describes a method to scramble one or more Program Elements in an MPEG-2 Program. Scrambling is performed at the Transport level, which essentially means that the payload of the 188-byte length packets gets encrypted. If there are several IP Multicast sessions sharing one Program Element (defined by one PID value), then all the sessions will be scrambled if A/70 is used. For DSM-CC Addressable Sections, ATSC A/90 offers Section-level scrambling, however, the use of this function has not been standardized. More details on Section-level scrambling are described in Section 11 of this document.

Transport-level scrambling can be used in conjunction with the appropriate application design to enable authors to perform selective scrambling of sessions and/or data components. For instance, if one were to implement the example defined as Case 4 (see previous section), then it would be possible to scramble the content of session 2 independently of session 1. Case 6 is the case where each IP Multicast stream of a session is carried in a single Program Element and therefore each IP Multicast media stream may be encrypted independently. Case 8 provides the opportunity for applying conditional access collectively to the IP Multicast media streams while leaving all session description datagrams in the clear (non-encrypted).

5.2 Mapping to ATSC Virtual Channels

5.2.1 Multiple Sessions in the Same Virtual Channel

Cases 2, 3, or 6 allow use of one or multiple ATSC A/90 Applications in the Virtual Channel containing the IP Multicast service. The fact that such IP Multicast sessions reside in the same

ATSC A/90 Application means that they have been authored so their IP Multicast addresses do not conflict. However, possibility for multiple insertion points may be a driving consideration to use several ATSC A/90 Applications in the same virtual channel. In both cases, the IP Multicast sessions and their instances are selected based on an application-level selection mechanism that uses the information provided in the SDP datagrams. Due to limitations in current receivers, it may be desirable to limit only one A/90 application per Virtual Channel if it is desired to run multiple IP Multicast sessions in the receiver.

5.2.2 Multiple Sessions and Multiple Virtual Channels

When it is desired to provide a distinct announcement in the EIT or DET of the schedule for each IP Multicast session, or when it is desired to allow a PSIP-based selection of an IP Multicast session, the ATSC A/90 Application referencing the Program Elements carrying the IP Multicast session stream can belong to a distinct PSIP Virtual Channel. In this situation, whether Case 2, 3, or 6 is used, the Program Elements conveying the IP Multicast session stream belongs not only to a distinct ATSC A/90 Application but also to a distinct ATSC Virtual Channel.

The previous sections described recommendations and suggestions to consider when mapping IP Multicast sessions into one or more applications. However, when multiple applications exist concurrently, it becomes possible to insert some of them in a different virtual channel. Applications need to be inserted in a different virtual channel mainly for two reasons: compatibility with cable [11], and the need to separately announce or signal applications in PSIP [2].

6. SDP USAGE CONSIDERATIONS

Normative Clause

The creation of the sessionID field values shall be such that the values are guaranteed at least not to collide with the sessionID field values of other sessions belonging to the same ATSC A/90 Application.

In order for authoring tools to ensure uniqueness of the sessionID values, they should be created as recommended in the SDP specification and use a hexadecimal representation of NTP time.

Normative Clause

The sum of the leak rates specified in all the SDP Session Descriptions (as specified by the b=CT:number entry) of a Data Service shall not exceed the leak rate specified by the sb_leak parameter associated with the data_service_profile field in the data_service_descriptor or by the sb_leak_rate field in the smoothing_buffer_descriptor associated with the ATSC Virtual Channel or the sum of the sb_leak_rate field(s) in the smoothing_buffer_descriptor(s) of the MPEG-2 Program Element(s) carrying the IP datagrams of the session. The bandwidth signaling shall be consistent between the SDP records, the A/90 descriptors, and the MPEG-2 descriptors.

7. DATAGRAM ENCAPSULATION

7.1 Introduction

IP Multicast datagrams are UDP/IP datagrams for which the IP destination address is in the range 224.0.0.0 to 239.255.255 as defined in [9]. Each datagram is encapsulated in DSMCC_Addressable_section structures as defined by [10].

7.2 Protocol Encapsulation

Normative Clause

Individual IP Multicast datagrams shall be conveyed by means of ATSC A/90 DSMCC_addressable_section structures. The corresponding ATSC A/90 protocol_encapsulation field value in the ATSC A/90 Data Service Table (DST) shall be set to 0x04. All DSMCC_addressable_section structures conveying the IP Multicast datagrams of an IP Multicast service shall be transmitted in one or more MPEG-2 Program Elements. The stream_type value associated with these Program Elements shall be equal to 0x0D.

7.3 DSM-CC Addressable sections

Normative Clause

When a DSM-CC Addressable section conveys an IP Multicast datagram with unscrambled deviceld fields, the deviceld[47...40], deviceld[39...32], and deviceld[31...24] fields shall be equal to 0x01, 0x00, and 0x5E, respectively as specified in [4]. Furthermore, the deviceld[23] bit shall always be set to '0' as specified in [10]. The LLC SNAP_flag field shall be set to '0' and the maximum transmission unit (MTU) of the IP datagrams shall be 4080 bytes.

7.4 Format of Device Identifier Fields

The format of the deviceld fields in the DSMCC_Addressable_section structures referenced by a Tap may be specified by the insertion of a multiprotocol_encapsulation_descriptor in the descriptor loop of that Tap.

Normative Clause

When the descriptor loop of an ATSC A/90 Tap referencing an MPEG-2 Program Element of protocol_encapsulation value 0x04 does not include a multiprotocol_encapsulation_descriptor structure, the default deviceld_address_range field value shall be 0x06 meaning that all 48 bits are valid. The default deviceld_IP_mapping_flag value shall be equal to '1' to indicate an IP to MAC address mapping according to RFC 1112 [4]. The default max_sections_per_datagram field value shall be equal to 0x01.

When a descriptor loop of an ATSC A/90 Tap referencing an MPEG-2 Program Element of protocol_encapsulation value 0x04 does not include a multiprotocol_encapsulation_descriptor structure, the value of the deviceld_IP_mapping_flag field shall always be equal to '1' to indicate an IP to MAC address mapping

according to RFC1112 [4]. The value of the max_sections_per_datagram field shall always be equal to 0x01.

The deviceld and MAC Address are interchangeable terms.

8. SERVICE ANNOUNCEMENT AND SCHEDULE

8.1 Introduction

A stand-alone IP Multicast service is a data service not related to any audio-visual event. The IP Multicast service may include one or several IP Multicast sessions. If the service includes multiple sessions, one or several ATSC A/90 Applications may be used to signal the sessions. The schedule of a standalone IP Multicast service is announced by means of instances of ATSC Data Event Tables (DET-k's). In this case, the value of the service_type field associated with the Virtual Channel in the PSIP Virtual Channel Table (VCT) is equal to 0x04. The one or more data Program Elements conveying the stand-alone IP Multicast service belong to a single and distinct ATSC Virtual Channel. Consequently, the PSIP Service Location Descriptor associated with the stand-alone IP Multicast service virtual channel does not include any Program Element of type 0x02 (MPEG-2 video) or 0x81 (AC-3 audio).

The schedule of a single IP Multicast service related to one or several audio-visual events is announced by means of instances of ATSC Event Information Tables (EIT-k's) or Data Event Tables (DET-k's). Scenarios for using DET-k tables versus EIT-k tables are documented in the ATSC A/90 specification. The IP Multicast service may include one or several IP Multicast sessions. If the service includes multiple sessions, one or several ATSC A/90 Applications may be used to signal the sessions. The value of the service_type field associated with the Virtual Channel in the PSIP Virtual Channel Table is equal to 0x02 if the Virtual Channel includes a video elementary stream of stream_type 0x02. It is equal to 0x03 if the Virtual Channel includes an audio elementary stream of stream_type 0x81 but no video elementary stream of stream_type 0x02. The one or more data Program Element(s) of an IP Multicast service belong to the same virtual channel as the video and/or audio elementary streams.

In both cases, the IPM Program Elements are listed in the Service Location Descriptor associated in the VCT with the ATSC Virtual Channel to which the IP Multicast service belongs. The ATSC Virtual Channel also includes one and only one MPEG-2 Program Element of stream_type 0x95 which is used to convey Service Description Framework information as specified in ATSC A/90 and further enhanced with the constraints and rules specified herein.

The announcement of the schedule of any IP Multicast service complies with the ATSC A/65A specification. The schedule of any IP Multicast service is published by means of Event Information Tables (EIT-k's) or Data Event Tables (DET-k's).

In the case of IP Multicast services related to one or multiple audio-visual events (service_type 0x02 or 0x03 as appropriate), the schedule (start time, duration) of the IP Multicast sessions may or may not coincide with the schedule of the associated audio-visual event.

8.2 Data Event Table (DET)

DET-k's are used for announcing the event schedule of a stand-alone IP Multicast service in an ATSC Virtual Channel. As specified in the ATSC A/90 specification, DET-k's may also be used for announcing an event of an IP Multicast service provided in an ATSC Virtual Channel that

also includes a video and/or audio event. In the latter case, both an EIT and DET are used, the EIT to announce the video and/or audio event(s), and the DET to announce the IP Multicast event(s).

8.3 Data Service Descriptor

As required by the ATSC A/90 specification, the descriptor loop associated with the IP Multicast service event in a DET-k or an EIT-k includes a `data_service_descriptor` structure. The value of the `data_service_profile` field in this descriptor is set to indicate the proper upper bandwidth bound used for the delivery of the IP Multicast service.

Normative Clause:

The value of the `data_service_level` field shall be set to 0x00 to indicate that the IP Multicast service is an asynchronous service.

8.4 PID Count Descriptor

The descriptor loop associated with the IP Multicast data broadcast event listed in a DET-k or an EIT-k may include a `PID_count_descriptor` structure [1]. The value of the `total_number_of_PIDs` field accounts for all the IPM Program Elements in the virtual channel. When the IP Multicast media stream(s) and the SDP datagram stream(s) are conveyed in the same MPEG-2 Program Element, the value of the `min_number_of_PIDs` field is equal to 0x02 to indicate that a meaningful rendition of the IP Multicast service can be obtained from only one data Program Element and the Program Element conveying the Data Service Table. When the IP Multicast media stream(s) and the SDP datagram stream(s) are conveyed in distinct MPEG-2 Program Elements, the value of `min_number_of_PIDs` field is equal to 0x03 to indicate that a meaningful rendition of the IP Multicast service can be obtained from two data Program Elements (one conveying the SDP datagrams and the other the media datagrams) and the Program Element conveying the Data Service Table.

9. SIGNALING FOR DISCOVERY AND BINDING OF AN IP MULTICAST SERVICE

9.1 Introduction

This specification defines a variety of ways for signaling an IP Multicast service within the Service Description Framework defined by the ATSC A/90 Specification. In this section, detailed usage recommendations are provided for each scenario. More specifically, the scenarios that are discussed are the following:

- 1) A single IP Multicast session on a single ATSC Virtual Channel
- 2) Multiple IP Multicast sessions on a single ATSC Virtual Channel
- 3) Multiple IP Multicast sessions on multiple ATSC Virtual Channels

Signaling information is used by the IP Multicast receiver to discover the IP Multicast service and to bind the various IP Multicast media and SDP announcement streams to particular MPEG-2 Program Elements. An additional structure that may be used in the ATSC A/90 Data Service Table is the `MAC_Address_List_descriptor`. This descriptor is discussed in the following section.

9.2 THE MAC Address List Descriptor

9.2.1 Definition

The MAC_Address_List_descriptor structure is defined in Section 18. This descriptor was originally defined by SCTE [11]. The MAC_Address_List_Descriptor may be used in the Data Service Table to list the MAC Layer Multicast addresses used in the ATSC Virtual Channel.

9.2.2 Use of this Descriptor in the Data Service Table (DST)

Normative Clause

The use of the MAC Address List descriptor is optional in the DST of a Virtual Channel conveying an IP Multicast service. The MAC_Address_List_descriptor may be located in the descriptor loop of a Tap referencing a Program Element of stream_type 0x0D and conveying IP Multicast datagrams encapsulated in DSMCC_Addressable_section structures. If the descriptor is used, both the value of the pdu_size field and the encapsulation_type field of the MAC_Address_List_descriptor structure shall always be equal to '11'.

The purpose of the MAC_Address_List_descriptor is to list MAC layer Multicast addresses present in a given MPEG-2 Program Element. A data receiver may elect to use the information provided by this descriptor to identify the Program Elements that need to be latched and acquired. The information provided in the descriptor is especially helpful if the IP Multicast service includes multiple sessions in the same A/90 Application or in the same Virtual Channel.

Normative Clause

In the case of an ATSC A/90 Application including an IP Multicast service, and if the MAC_Address_List_descriptor is used in this ATSC A/90 Application, the union set of all the MAC_Address_List_descriptor structures pertaining to an ATSC A/90 Application shall provide an exhaustive list of all the MAC layer Multicast addresses present in the IP Multicast service.

9.3 Single IP Multicast Service in a Single Virtual Channel

9.3.1 Case of a Single IPM Program Element

In this scenario, an IP Multicast service consists of a unique IP Multicast session and both the SDP datagram stream and the IP Multicast media streams are conveyed in one data Program Element. The ATSC A/90 Application listing this IP Multicast service includes one Tap for referencing the MPEG-2 Program Element conveying the IP Multicast datagrams. The referencing mechanism is done according to the ATSC A/90 specification. Consequently, an association_tag_descriptor structure is inserted in the ES_info loop of the PMT associated with the ATSC Virtual Channel where the IP Multicast service is delivered.

It may happen that the IPM Program Element is not part of the MPEG-2 Program, or it is not part of the same MPEG-2 Transport Stream associated with the ATSC Virtual Channel where the IP Multicast service is provided. In both cases, the DSM-CC deferredMPEGProgramElement resource descriptor is included in the ATSC A/90 Network Resource Table to allow

unambiguous identification of the location of the IPM Program Element in the external MPEG-2 Program or MPEG-2 Transport Stream.

9.3.2 Case of Multiple IPM Program Elements

In this scenario, multiple data Program Elements are used to convey the SDP stream and the IP Multicast media streams. Per ATSC A/90 [1]), at least one T_{ap} is associated with each Program Element conveying the datagrams of the IP Multicast session.

9.3.3 Taps and Application

All Taps are listed in the Data Service Table as belonging to a single data application. When multiple Program Elements are used to carry the IP Multicast session, it is possible to assign distinct leak rates and maximum bit rates to each Program Element as described in the ATSC A/90 specification.

9.4 Multiple IP Multicast Sessions on a Single Virtual Channel

It is possible to have multiple IP Multicast sessions bound to the same Virtual Channel within the same ATSC Transport Stream. This is applicable whether the IP Multicast service is a stand-alone service or a service related to an audio-visual event. In this case, each individual media stream (the IP datagrams conveying the media datagrams of one SDP session) may be conveyed in a distinct set of MPEG-2 Program Elements.

It is possible that an author may create multiple session instances within a single IP Multicast session, for example to provide multiple language options. These multiple sessions would be announced in the standard SDP fields. As in the previous case, there is at least one T_{ap} associated with each MPEG-2 Program Element conveying datagrams of the IP Multicast service.

The IP Multicast sessions may be conveyed in a single or in multiple A/90 Applications.

9.4.1 Single Application

It may be desirable to group all IP Multicast sessions in a single ATSC A/90 Application. Individual applications are not announced in the standardized program guide (PSIP) and therefore, session selection and schedule cannot be based solely on PSIP. A receiver that finds an application with data Program Elements conveying IP Multicast data will have to monitor these streams to collect the SDP packets. The receiver application is responsible for sorting the streams out at the IP network layer based on the information in the union of the SDP announcements. The information retrieved from SDP packets is then used to request session selection from users, for example, by using a small menu superimposed on the screen.

9.4.2 Multiple Applications

Instead of inserting all IP Multicast sessions into one ATSC A/90 application, it is also possible to use a separate application per session. The collection of applications is called in A/90 a Data Service. Individual applications in a single Data Service are not announced in the standardized program guide (PSIP) and therefore, session selection and schedule cannot be based solely on PSIP. In this case, a receiver that finds multiple applications with IP Multicast content will have to monitor all the Program Elements that carry IP Multicast. The receiver then collects the SDP packets that can be used to offer session selection to users.

9.5 Multiple IP Multicast Services on Multiple Virtual Channels

Instead of inserting all IP Multicast sessions in a single virtual channel, it is also possible to use a different virtual channel per session. In this case, each virtual channel may reference the same video and audio elementary streams in the PSIP Service Location Descriptor associated with the Virtual Channel (each Virtual Channel of course, has a corresponding MPEG-2 Program and PMT). This permits the use of EIT-k's or DET-k's to announce the schedule, rating and name of each session. The advantage of this option is that users searching for a particular session may do so by navigating the channel lists of the standardized program guide (PSIP).

10. BUFFER MODEL

There is an IP Multicast application buffer for each Program Element referenced by a Tap of protocol_encapsulation value 0x04. Only IP Multicast datagrams enter the IP Multicast application buffer. Other bytes are discarded and may be used to control the system. Bytes enter the IP Multicast application buffer at the rate specified by the sb_leak parameter associated with the profile of the data service or by the sb_leak_rate field in the smoothing_buffer_descriptor associated with the Program Element conveying the IP Multicast datagrams.

Normative Clause

The size of the IP Multicast application buffer shall be equal to 262144 bytes. The IP Multicast datagrams shall be sent such that the IP Multicast application buffer shall not overflow.

This corresponds to the acquisition of 65536 bytes UDP datagrams on two distinct ports, with the assumption that one UDP datagram is being removed from the buffer while another one is being aggregated in the buffer. Bytes of a UDP datagram payload are removed out of the application buffer once it has been reconstructed in the application buffer.

The application buffer corresponds to the collection of buffers IPGRMBnk, FRAGBnkj, and UDPnkji defined in Section 17.

11. SCRAMBLING OF MAC LAYER MULTICAST ADDRESSES

The method for scrambling the deviceld fields and/or the payload of DSMCC_Addressable_section structures is outside the scope of this specification.

11.1 Payload Scrambling

The payload of DSMCC_addressable_section structures may be scrambled. In this case, scrambling is signaled by means of the 2-bit payload_scrambling_control field in the DSMCC_addressable_section header, as specified by the ATSC A/90 Data Broadcast standard.

11.2 Device Identifier Scrambling

The deviceld fields in a DSMCC_addressable_section structure may be scrambled or not scrambled. The presence of scrambling is signaled by the 2-bit field address_scrambling_control in the header bytes of the DSMCC_addressable_section structure. Scrambling has been applied when this field is greater than 0. A MAC layer Multicast address in the DSMCC_addressable_section structure should map to a MAC layer Multicast address appearing either in the Tap selector_type 0x0102 structure

or in the `MAC_Address_List_descriptor` structure within the DST of the ATSC A/90 Application to which the IP Multicast service belongs.

Normative Clause

MAC layer Multicast addresses appearing as scrambled in the header bytes of the DSMCC_addressable_section shall also appear as scrambled if referenced in the Data Service Table.

12. ACQUISITION PROCEDURE

The acquisition of the IP Multicast service is based on the various ISO/IEC 13818-1, ATSC PSIP [2]) and ATSC A/90 [1]) structures. The relationship between the various ISO/IEC 13818-1 and ATSC tables is shown in Figure 12.1.

Figure 12-1 illustrates the most common case of one virtual channel conveying a single IP Multicast session in a single Program Element. The IP Multicast service is related to a video elementary stream. Hence in this example, the PSIP `service_type` is 0x02. Also it is assumed that the IP Multicast data Program Element is conveyed in the same MPEG-2 Program as the data Program Element conveying the Service Description Framework. This example does not have any requirement for Internet network access or for external Program Elements. Therefore, Figure 12.1 does not include a Network Resource Table.

In Figure 12.1, dashed lines show field correspondences. Fields linked by a dashed line have the same value (per other ATSC standards). Solid, thick lines refer to PID-based identification of the Transport Packets conveying a particular Program Element (like the solid line from the `program_map_PID` field in the PAT to the PMT). The solid, thin lines refer to the IP Multicast address-based identification of the DSM-CC Addressable sections conveying the IP Multicast media streams.

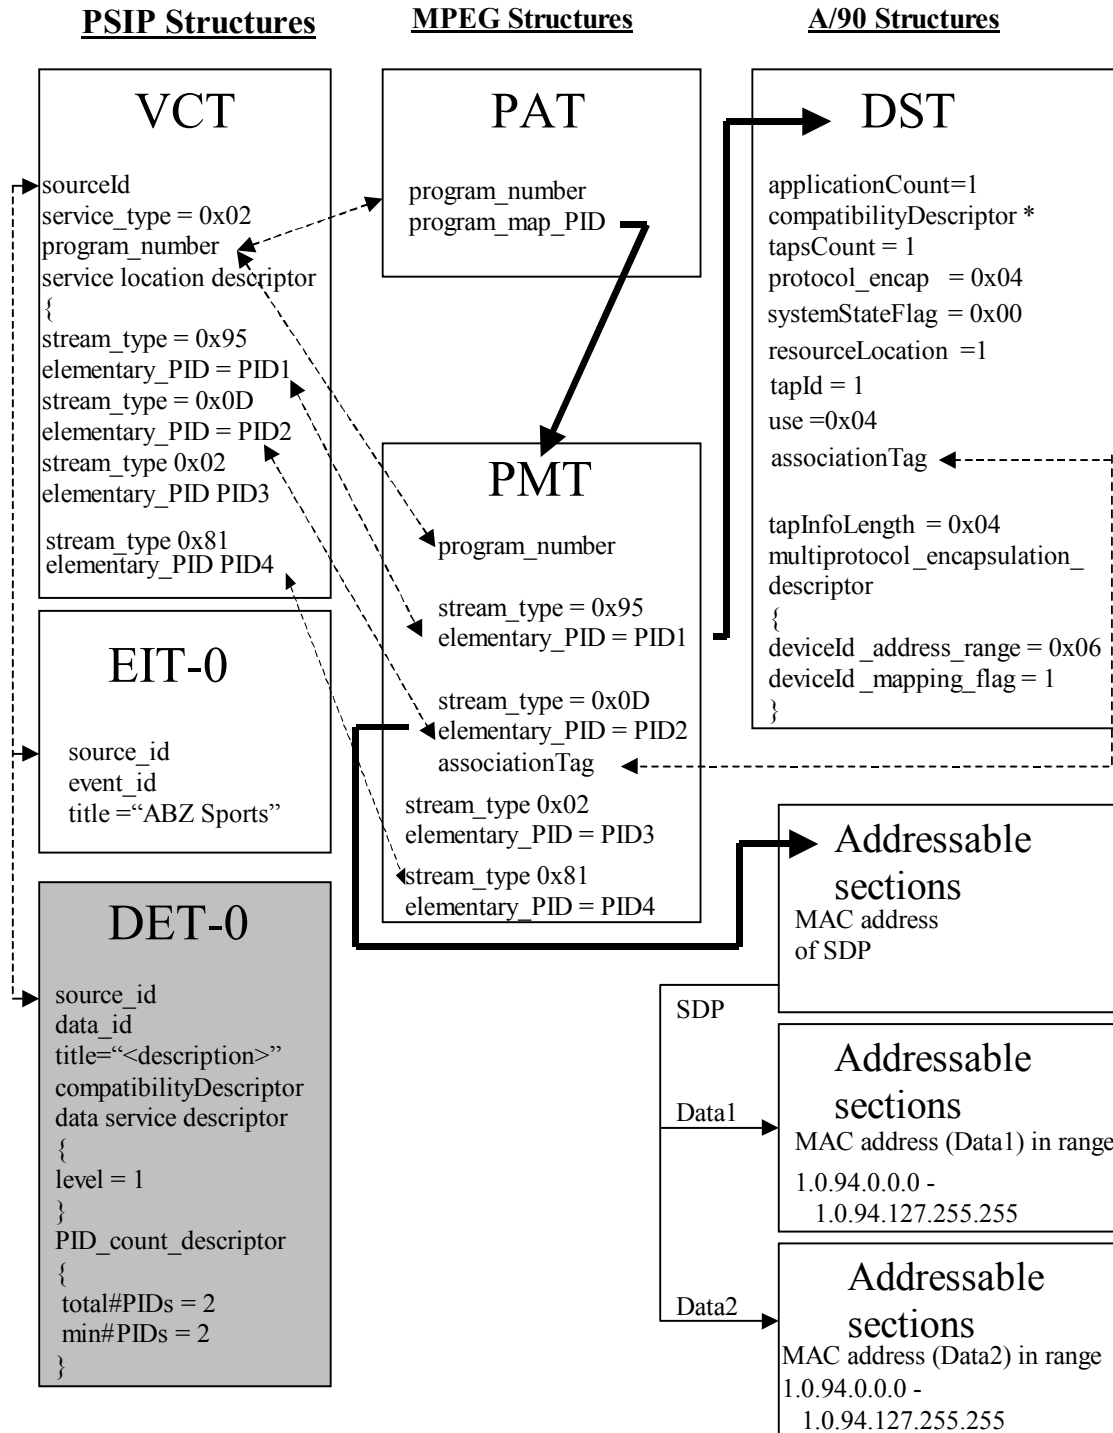


Figure 12.1 PSI and PSIP table hierarchy used for the announcement and signaling of data services carrying IP Multicast sessions in the ATSC environment.

The Virtual Channel Table (VCT) is transmitted in Transport Stream packets referenced by the PID value 0x1FFB. The `source_id` field associated with the virtual channel in the VCT allows for the identification of the instances of the Event Information Tables (EIT-k's) announcing the audio-visual event schedule. It also identifies the instances of the Data Event Tables (DET-k's) announcing the schedule of the associated IP Multicast service. The location of the EIT-k's and DET-k's in the Transport Stream is specified in the PSIP Master Guide Table. The instances of the DET-k's conveying the IP Multicast service schedule include a title text structure that may be reported in the on-screen display of the Program Guide.

The audio, video, and IPM Program Elements belong to the same virtual channel so the audio-visual event can be enhanced by the IP Multicast service.

The PSIP Service Location Descriptor in the VCT is used to aggregate the MPEG-2 Program Elements making up the virtual channel. A virtual channel with an IP Multicast service includes one and only one MPEG-2 Program Element of `stream_type` 0x95. In Figure 12.1, the `elementary_PID` value PID1 associated with the Program Element of `stream_type` value 0x95 specifies the Transport Stream packets conveying the Data Service Table and the Network Resources Table in the virtual channel. The `elementary_PID` value PID2 of `stream_type` value 0x0D identifies the Transport Stream packets conveying the DSM-CC Addressable sections where the IP Multicast datagrams are encapsulated. The `elementary_PID` values PID1 and PID2 are also listed in the PMT. The virtual channel may include additional `elementary_PID` values for video and audio streams. This is shown in Figure 12.1 where a video elementary stream of type 0x02 is signaled in the Service Location Descriptor. Since in this example the IP Multicast service is related to a video event, the `service_type` value in the VCT is equal to 0x02.

The Program Association Table (PAT) in the ATSC Transport Stream identifies the PID value of the Transport Stream packets conveying the Program Map Table (PMT). The PMT includes an MPEG-2 Program featuring the video, audio, and IP Multicast data Program Elements aggregated by the virtual channel. The MPEG-2 Program number in the PAT and the PMT match the program number associated with the virtual channel listed in the VCT.

In the example, the Data Service Table consists of one IP Multicast application featuring one Tap structure. The Tap structure includes an `associationTag` allowing identification of the location (the `elementary_PID` value) of the IPM Program Element within the ATSC Transport Stream. The `elementary_PID` value associated with the IPM Program Element is obtained by matching the `associationTag` value in the Tap structure with the `associationTag` value in the Association Tag Descriptor within the PMT. The Tap information loop includes a Multiprotocol Encapsulation Descriptor to signal the number of active bytes used in the `deviceld` fields of the DSM-CC Addressable Sections. The `deviceld_address_range` field value is set to 0x06 to indicate that all `deviceld` bytes are active. The `deviceld_mapping_flag` is set to 1 to indicate that `deviceld` fields represent a MAC multicast address.

The Session Description Protocol datagrams are received in DSM-CC Addressable Sections with `deviceld` fields representing the SDP IP Multicast address. The SDP datagrams publish the IP Multicast address(es) of the IP Multicast media streams that make up the IP Multicast session. These non-SDP data streams can be filtered appropriately by the receiver based on the value of the `deviceld` fields in the DSM-CC Addressable Section header bytes, or at the IP network layer.

In this example, all IP Multicast datagrams are carried in the same data Program Element, and thus are not announced in separate Taps in the DST.

13. PSIP VIRTUAL CHANNEL TABLE (VCT)

The syntax of the PSIP Terrestrial Virtual Channel Table follows the ATSC PSIP specification [2]. In particular, the Service Location Descriptor (SLD) in the TVCT associated with the virtual channel featuring the IP Multicast service includes a Program Element of `stream_type` value equal to 0x95 to indicate the presence of the Service Description Framework information. In addition, when an IP Multicast Program Element belongs to the same MPEG-2 Program as the SDF Program Element, the Service Location Descriptor includes a data Program Element of `stream_type` value equal to 0x0D to signal IP Multicast datagrams encapsulated in DSM-CC addressable sections.

Normative Clause

In the Virtual Channel Table Service Location Descriptor of the virtual channel containing an IP Multicast service, the ISO_639_language_code field associated with either the Program Elements conveying the IP Multicast datagrams or the Program Element conveying the Service Description Framework information shall be equal to 0x00.

14. NETWORK RESOURCE TABLE (NRT)

External media streams or SDP records belonging to the IP Multicast Service and located in other Virtual Channels, other ATSC transports, or in another IP network of the receiver are required by A/90 to be signaled in the Network Resource Table (NRT). In general, the NRT is used when either:

- 1) IP datagrams are conveyed in a data Program Element belonging to an MPEG-2 Program or an ATSC Transport Stream other than the one used to convey the Data Service Table of the IP Multicast service, or
- 2) The receiver application consuming this service requires access to external Internet network.

15. AN EXAMPLE USING SMPTE DECLARATIVE DATA ESSENCE (DDE)

SMPTE Declarative Data Essence (DDE) [8] uses the well-known, registered IP Multicast address, 224.0.1.113, and the well-known port, 2670 to convey the SDP datagrams.

The DST `app_id_description` field value is set to 0x0000 and in this example the `app_id_bytes` text starts with the characters “`lid://author_organization.com/News/20010327`”, to indicate that this is a specific instance of an IP Multicast session.

The MAC layer multicast address is derived from the IP Multicast address above according to RFC 1112 and RFC 1700 and is 1.0.94.0.1.113 (01-00-5E-00-01-71 hex).

Using the parameters above, the detailed syntax for the example where there are multiple DDE IPM streams announced and signaled as multiple virtual channels is as follows:

15.1 DSMCC Addressable Section

Table 15.1 DSMCC_addressable_section Structure

Syntax	No. of Bits	Mnemonic
DSMCC_addressable_section() {		
table_id	8	0x3F
'0'	1	
protection_indicator	1	bslbf
reserved	2	'11'
addressable_section_length	12	uimsbf
deviceld[7..0]	8	uimsbf
deviceld[15..8]	8	uimsbf
reserved	2	'11'
payload_scrambling_control	2	bslbf
address_scrambling_control	2	bslbf
LLCSNAP_flag	1	'0'
'1'	1	
section_number	8	0x00
last_section_number	8	0x00
deviceld[22..16]	7	uimsbf
deviceld[23]	1	'0'
deviceld[31..24]	8	0x5E
deviceld[39..32]	8	0x00
deviceld[47..40]	8	0x01
for (j=0;j<N1;j++) {		
datagram_data_byte	8	bslbf
}		
if (section_number == last_section_number) {		
for (j=0;j<N2;j++) {		
stuffing_byte	8	bslbf
}		
}		
if (protection_indicator == 1) {		
checksum	32	uimsbf
}		
else{		
CRC_32	32	rpchof
}		
}		

15.2 Data Event Table (DET)

Table 15.2 Data Event Table Section

Syntax	No. of Bits	Format
data_event_table_section () {		
table_id	8	0xCE
section_syntax_indicator	1	'1'
private_indicator	1	'1'
reserved	2	'11'
section_length	12	uimsbf
source_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next_indicator	1	'1'
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_data_in_section	8	uimsbf
for (j = 0; j < num_data_in_section; j++) {		
reserved	2	'11'
data_id	14	uimsbf
start_time	32	uimsbf
reserved	2	'11'
ETM_location	2	uimsbf
length_in_seconds	20	uimsbf
title_length	8	uimsbf
title_text()	var	uimsbf
reserved	4	'1111'
descriptors_length	12	uimsbf
for (i=0; i<N; i++) {		
descriptor()		
}		
}		
CRC_32	32	rpchof
}		

15.3 Data Service Descriptor

Table 15.3 Data Service Descriptor

Syntax	No. of Bits	Format
data_service_descriptor () {		
descriptor_tag	8	0xA4
descriptor_length	8	uimsbf
data_service_profile	8	uimsbf
data_service_level	8	0x00
private_data_length	8	uimsbf
for(i=0; i<private_data_length; i++) {		
private_data_byte	8	bslbf
}		
}		

15.4 PID Count Descriptor

Table 15.4 PID Count Descriptor

Syntax	No. of Bits	Format
PID_count_descriptor () {		
descriptor_tag	8	0xA5
descriptor_length	8	0x04
reserved	3	'111'
total_number_of_PIDs	13	uimsbf
reserved	3	'111'
min_number_of_PIDs	13	'0000000000010'
}		

15.5 Compatibility Descriptor

Table 15.5 Compatibility Descriptor

Syntax	No. of Bits	Format
compatibility_descriptor() {		
compatibilityDescriptorLength	16	uimsbf
descriptorCount	16	uimsbf
for (i=0; i<descriptorCount; i++) {		
descriptorType	8	0x02
descriptorLength	8	uimsbf
specifierType	8	0x01
specifierData	24	
model	16	
version	16	
subDescriptorCount	8	uimsbf
for (j=0; j<subDescriptorCount; j++) {		
subDescriptor()		
}		
}		
}		

15.6 Data Service Table (DST)

Table 15.6 data_service_table_bytes Structure

Syntax	No. of Bits	Format
data_service_table_bytes() {		
sdf_protocol_version	8	0x01
application_count	8	uimsbf
for(j = 0; j < application_count; j++) {		
compatibility_descriptor()		
app_id_byte_length	16	uimsbf
app_id_description	16	uimsbf
for(i=0;i<app_id_byte_length-2;i++) {		
app_id_byte	8	bslbf
}		
tap_count	8	0x01
for(i = 0; i < tap_count; i++) {		
protocol_encapsulation	8	0x04
action_type	7	'0000000'
resource_location	1	bslbf

tap_id	16	uimsbf
use	16	0x0004
association_tag	16	uimsbf
selector_length	8	0x00
tap_info_length	16	0x04
descriptor_tag	8	0xA7
descriptor_length	8	
deviceId_address_range	3	0x06
deviceId_IP_mapping_flag	1	'1'
alignment_indicator	1	'0'
reserved	3	'111'
max_sections_per_datagram	8	0x01
}		
app_data_length	16	uimsbf
for(i = 0; i < app_data_length; i++) {		
app_data_byte	8	bslbf
}		
app_info_length	16	uimsbf
for(i=0; i < M; i++) {		
descriptor()		
}		
}		
service_info_length	16	uimsbf
for(j=0; j<K;j++){		
descriptor()		
}		
service_private_data_length	16	uimsbf
for(j = 0; j < servicePrivateDataLength; j++) {		
service_private_data_byte	8	bslbf
}		
}		

16. IMPLEMENTATION INFORMATION ON THE IP NETWORK MODEL

The following items are considerations and ramifications of the IP Network Model defined in Section 4.


- When a Program Element (in Transport packet format) is passed through any piece of equipment that can insert or re-multiplex Program Elements (i.e., a multiplexor), one must make the conscious decision about whether that piece of equipment is acting as a bridge or a router. The latter would require enforcement of packet scoping rules, decrementing of Time-To-Live (TTL) values, etc. It is expected that most broadcast equipment will initially operate as bridges to avoid having to modify the streams.

- When it is known that a Program Element carries IP data, multiplexing of new IP data into the same Program Element must be done with care. The precaution in this case is the need to ensure that there is no conflict between IP addresses of the old and new data.
- Administratively scoped packets can only be inserted at the last route before emission. Since in the general case, this point is not known to the content author, it is difficult to use administratively scoped addresses unless the communication is known to be between the emission station and the receiver, such as for service and maintenance. This case ensures a single route. Network topologies such as local 1394 networks at the receiver end prevent any practical use of administratively scoped addresses by general content authors, often including broadcast studios.
- Administratively scoped packets cannot be forwarded across a multiplexor that is acting as a router.
- When crossing any router, then the TTL must be decremented by that router. Thus, a TTL value of 1 should not be used when authoring, even in the broadcaster studio.
- And, from a receiver application perspective, each Program Element is necessarily its own network interface model.

The above are just some relevant examples. Consult general IP network guidelines from IETF for more information and details.

17. IP MULTICAST BUFFER MODEL

The application buffer model for acquisition of the IP Multicast datagrams is illustrated in Figure 17.1. The model assumes that datagrams are carried in UDP datagrams encapsulated in IP datagrams.

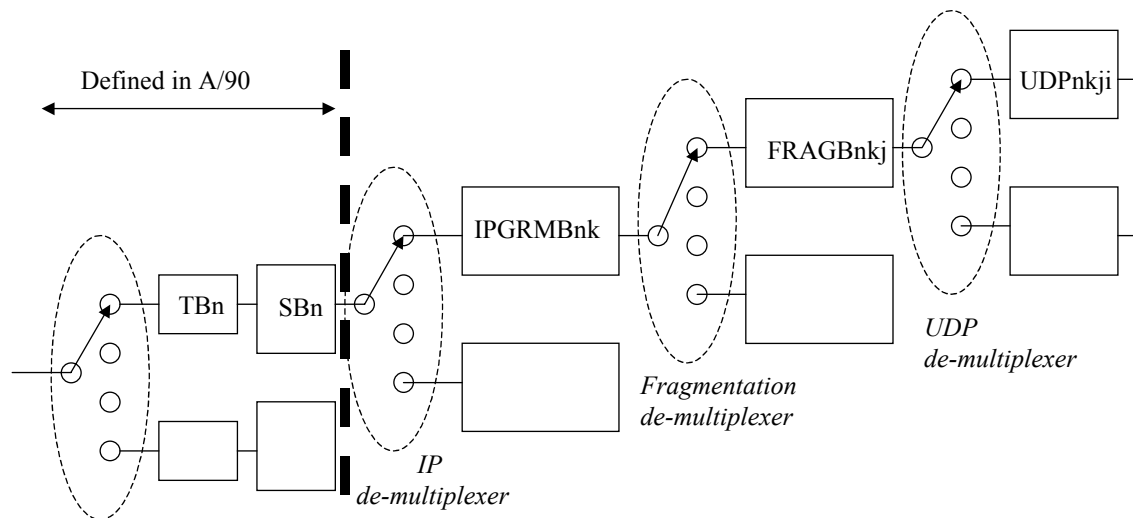

TB_n: is the Transport Buffer for data elementary stream *n*

SB_n: is the smoothing buffer for data elementary stream *n*

IPGRMB_{nk}: Is the IP datagram buffer for IP datagrams of multicast address *k* in data elementary stream *n*

FRAGB_{nkj}: Is the IP fragmentation buffer for fragmentation identifier *j* for IP datagrams of multicast address *k* in data elementary stream *n*

UDPN_{kji}: Is the UDP buffer for destination Port *i* for fragmentation identifier *j* for IP datagrams of IP multicast address *k* in data elementary stream *n*

Figure 17.1 Application Buffer Model for the acquisition of IP Multicast data.

Complete Transport Stream packets containing data from Program Element *n* are passed to the transport buffer for data Program Element *n*, TB_n. The size of TB_n is fixed at 512 bytes. All bytes that enter TB_n are removed from TB_n at a rate $R_{Xn} = 1.2 R_{max}[\text{profile}]$, where $R_{max}[\text{profile}]$ is the maximum data rate associated with the data service profile as specified by the data service profile. When there is no data in buffer TB_n, rate R_{Xn} is equal to zero. Duplicate Transport Stream packets are not delivered to SB_n. The Transport Stream buffer is not allowed to overflow.

Only the header of DSMCC_addressable_section structures, payload, and CRC_32 data bytes are delivered to buffer SB_n; all other bytes do not enter SB_n and may be used to control the system. The size of SB_n is specified by data service profile. If there is data in buffer SB_n, the data is taken out of SB_n at a rate specified by *sb_leak*, the leak value specified by the data service or by the smoothing buffer descriptor associated with the IPM Program Element *n*. The buffer SB_n is not allowed overflow.

The IP Multicast datagram bytes in buffer SB_n are all delivered to their associated IP datagrams buffer at the rate specified by data service profile or by the smoothing buffer descriptor associated with the IPM Program Element *n*. Only IP datagram payload data bytes for IP Multicast address *k* enter buffer IPGRMB_{nk}. Bytes from the DSM-CC Addressable section header bytes carrying bytes of a datagram of IP Multicast *k* in data Program Element *n* are discarded and may be used to control the system. Bytes from the DSM-CC Addressable section

CRC_32 fields that immediately follow the last IP datagram byte are discarded and may be used to verify the integrity of the data. When there is no DSM-CC Addressable section data present in SB_n, no data is removed from SB_n. All data that enters SB_n leaves it. All DSM-CC Addressable section payload bytes of data Program Element *n* enter the IP de-multiplexor instantaneously upon leaving SB_n. DSM-CC Addressable section header bytes and CRC32 bytes are removed instantaneously upon leaving SB_n. The buffer IPGRMB_{nk} is not allowed to overflow.

The payload bytes of the IP Multicast datagrams in buffer IPGRMB_{nk} are all delivered to their associated IP Fragmentation buffer at the rate specified by the data service profile or by the smoothing buffer descriptor associated with the IPM Program Element *n*. Only IP datagram data bytes of fragment pertaining to identification *j* of IP datagram with IP Multicast address *k* in data Program Element *n* enter buffer FRAG_{nkj}. Bytes from the IP datagram header are discarded and may be used to control the system and verify the integrity of the IP header. When there is no IP datagrams data present in IPGRMB_{nk}, no data is removed from IPGRMB_{nk}. All data that enters IPGRMB_{nk} leaves it. All IP datagram payload bytes of IP Multicast address *k* in data Program Element *n* enter the Fragmentation de-multiplexor instantaneously upon leaving IPGRMB_{nk}. IP datagram header bytes are removed instantaneously upon leaving IPGRMB_{nk}. The buffer FRAG_{nkj} is not allowed to overflow.

The IP datagram fragment data bytes in buffer FRAG_{nkj} are used to reconstruct the original, non-fragmented, IP datagram payload. Last fragment pertaining to a re-constructed datagram may be identified by means of the control fragmentation flag bit in the IP datagram header. The payload bytes of the original, non-fragmented, IP datagram are all delivered to the UDP buffer at a rate specified by the data service profile or by the smoothing buffer descriptor associated with the IPM Program Element *n*. Only UDP PDU payload data bytes of destination port *i* of the IP datagram re-constructed under fragmentation identifier *j* of the IP datagram with IP Multicast address *k* in data Program Element *n* enter buffer UDP_{nkji}. Bytes from the UDP PDU header are discarded and may be used to control the system and may be used to verify the integrity of the IP pseudo-header. When there are no IP payload data bytes in the FRAG_{nkj} buffer, no data is removed from FRAG_{nkj}. All data that enters FRAG_{nkj} leaves it. All IP datagram payload bytes belonging to fragmentation of identification *j* of IP Multicast address *k* in data Program Element *n* enter the UDP de-multiplexor instantaneously upon leaving FRAG_{nkj}. UDP PDU header bytes are removed instantaneously upon leaving FRAG_{nkj}. The buffer UDP_{nkji} is not allowed to overflow.

Once a UDP datagram has been fully reconstructed, the payload data bytes of the UDP PDU in buffer UDP_{nkji} are all delivered at the rate specified by the data service profile or by the smoothing buffer descriptor associated with the IPM Program Element *n*. Only UDP PDU payload data bytes are delivered to the output at a rate specified by the data service or by the smoothing buffer descriptor associated with the IPM Program Element *n*. Other bytes are discarded and may be used to control the system. When there is no UDP PDU data present in UDP_{nkji}, no data is removed from UDP_{nkji}. All data that enter UDP_{nkji} leaves it. UDP PDU header bytes are removed instantaneously upon leaving UDP_{nkji}. The buffer UDP_{nkji} is not allowed to overflow. The size of the IPGRMB_{nk}, FRAG_{nkj}, and UDP_{nkji} is IPGRMBS_{nk}, FRAGBS_{nkj}, and UDPBS_{nkji}, respectively.

18. MAC ADDRESS LIST DESCRIPTOR (NORMATIVE)

The `MAC_Address_List_descriptor` structure shall conform to the syntax and semantics defined in Table 18.1. This descriptor was originally defined by SCTE [11]. Please refer to [11] for the use of this descriptor in a cable environment.

Table 18.1 Definition of the `MAC_Address_List_descriptor` Structure

Syntax	No. of Bits	Mnemonic
<code>MAC_Address_List_descriptor() {</code>		
descriptor_tag	8	uimsbf
descriptor_length	8	uimsbf
mac_addr_list	1	bslbf
mac_addr_range	1	bslbf
pdu_size	2	bslbf
encapsulation_type	2	bslbf
reserved	2	'11'
if(<code>mac_addr_list == '1'</code>){		
num_in_mac_list	8	uimsbf
for(<code>i =0; i < num_in_mac_list; i++</code>){		
mac_address	48	uimsbf
}		
}		
if(<code>mac_addr_range == '1'</code>){		
num_of_mac_ranges	8	uimsbf
for(<code>i=0; i<num_of_mac_ranges; i++</code>){		
highest_mac_address	48	uimsbf
lowest_mac_address	48	uimsbf
}		
}		
for(<code>i =0; i < K; i++</code>)		
private_data_byte	8	uimsbf
}		
}		

descriptor_tag This 8-bit field shall have the value 0xAC to identify this descriptor as a `MAC_Address_List_descriptor`.

descriptor_length This 8-bit field shall specify the length in bytes of the fields immediately following this field up to the end of this descriptor.

mac_addr_list This 1-bit field shall be to '1' if the descriptor includes a set of destination MAC addresses. This field shall be set to '0' otherwise.

mac_addr_range This 1-bit field shall be set to '1' if the descriptor includes a range of destination MAC addresses where the range is specified by the `highest_mac_address` and `lowest_mac_address` fields. This field shall be set to '0' otherwise.

pdu_size This 2-bit field shall indicate the maximum length of IP datagram fragments encapsulated in the associated DSM-CC Program Element. Table 18.2 specifies the encoding of this field.

Table 18.2 Definition of the pdu_size Field

Value	pdu_size
'00'	maximum 1024 bytes sections
'01'	reserved
'10'	reserved
'11'	maximum 4096 bytes sections

encapsulation_type This 2-bit field shall indicate the type of multiprotocol encapsulation performed on sections. Table 18.3 specifies the encoding of this field.

Table 18.3 Definition of the encapsulation_type Field

Value	encapsulation_type
'00'	DVB MPE (datagram_section structure)
'01'	Reserved
'10'	Reserved
'11'	ATSC MPE (DSMCC_addressable_section structure)

num_of_mac_list This 8-bit field shall indicate the number of MAC addresses contained within this descriptor.

num_of_mac_ranges This 8-bit field shall indicate the number of MAC addresses pairs with a high/low range contained within this descriptor.

mac_address This 48-bit field shall specify a MAC group address.

highest_mac_address This 48-bit field shall specify the value of the largest group MAC address listed in this descriptor.

lowest_mac_address This 48-bit field shall specify the value of the smallest group MAC address listed in this descriptor.

private_data_byte This 8-bit field shall represent a byte of any additional information that may be used to identify the stream of datagrams.

19. COMPARATIVE DESCRIPTION OF IP MULTICAST IN TERRESTRIAL AND CABLE

While this document describes session-based IP Multicast applications for terrestrial broadcast, SCTE DVS-311 [11] defines a similar function for cable. This Section describes the similarities and differences between both architectures, with the purpose of facilitating their joint implementation.

19.1 Encapsulation

DVS-311 supports two very similar encapsulation formats defined by ISO/ATSC and DVB respectively. Table 19.1 lists the minor differences that exist between these two encapsulation formats.

Table 19.1 Bit-Field Differences in the Encapsulation Methods of ISO/ATSC and DVB

Field	ISO/ATSC	DVB	Comment
table_id	0x3F	0x3E	
section_syntax_indicator	0	1	
error_detection_indicator (in ISO) protection_indicator (in ATSC) and private_indicator (in DVS-311)	0 or 1	0	In ISO/ATSC, this field is used to indicate the error detection and/or protection to use.
deviceld fields (in ISO/ATSC) and MAC_address_n fields (in DVS-311)			Different names but identical semantics.
Error detection/correction method for section	Checksum or CRC_32	CRC_32	ISO/ATSC allows two different methods.

19.2 Signaling

This is the part where both implementations have the largest divergence. The two main differences in this area involve the definition of a “network” and the tables used to perform signaling. Both issues will be covered in this section.

In the ATSC environment, one MPEG-2 Program (defined by the PMT) may contain one or more applications that include IP Multicast streams. Each of these applications constitutes an independent “network”. In the cable environment, on the other hand, an MPEG-2 program supports only one “network” (recall that there is no notion of A/90 applications in cable). Figure 19.1 illustrates this concept. The importance of defining network boundaries comes from the fact that when multiple IP sources are injected into one network, the operator must ensure that there are no IP address conflicts.

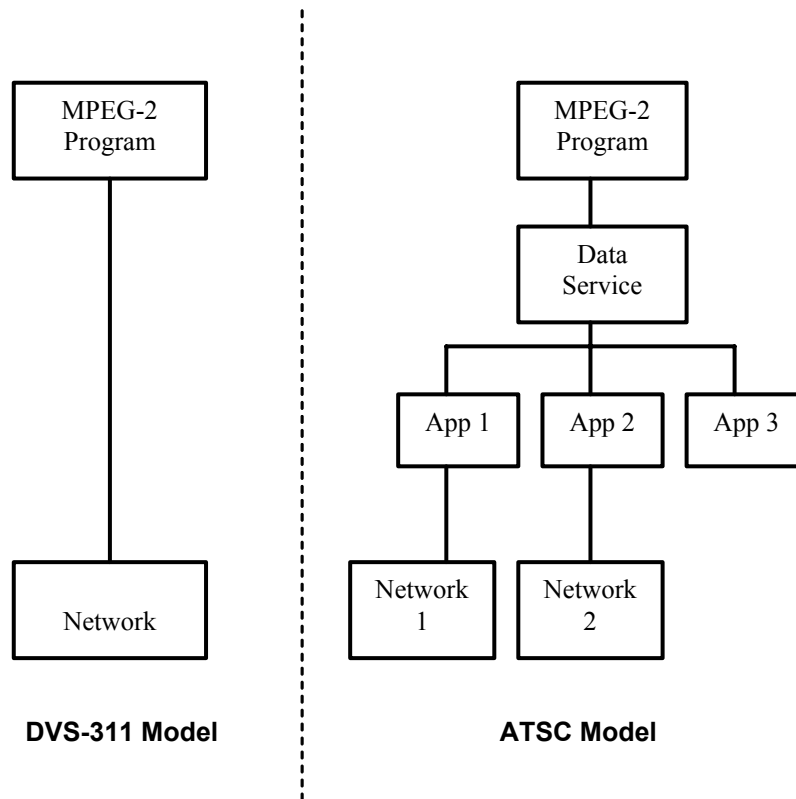


Figure 19.1 Network models for ATSC and DVS-311.

ATSC facilitates injection of several independently authored IP Multicast applications into one MPEG-2 program by supporting multiple networks. Source material may be injected at one or multiple points in the distribution chain. In cable, this function requires management of IP addresses to avoid collisions. However, the ability of ATSC to inject IP Multicast sessions as different networks comes at the expense of a more complex signaling mechanism based on the DST.

Notice from Figure 19.1 that if an ATSC data service is restricted to a single application, then both environments, cable and terrestrial, become much more compatible by sharing the notion of one network per MPEG-2 service.

All Program Elements that carry IP Multicast data are signaled in the PMT by having a `stream_type` indicator equal to 0x0D. Figure 19.2 shows an example of a PMT. In the cable environment, detection of Program Elements with this stream type automatically implies the detection of a network. In the ATSC environment, after finding N streams with this stream type, receivers need to access the Data Service Table (DST) to determine:

- How many networks exist
- How to associate a network with one or more “PID” values
- If the streams with `stream_type` value 0x0D contain IP Multicast packets or instead, contain some other type of addressable information

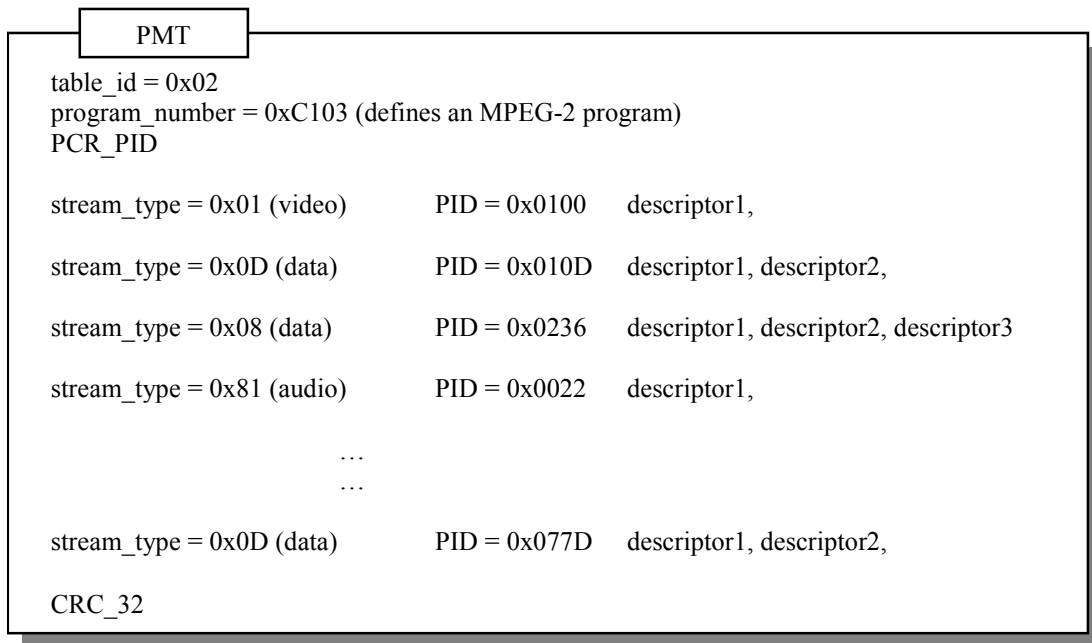


Figure 19.2 Example of a PMT that includes streams with addressable sections (stream type of 0x0D).

Figure 19.3 shows the configuration of a DST table with multiple applications. The number of applications that carry IP Multicast streams gives the number of available IP networks. For every signaled application, the DST provides information on the number of Taps that compose the application, and then every tap is categorized as belonging to one kind of encapsulation. For example, a tap may point to a synchronized PES stream, a DSM-CC carousel stream, or an IP Multicast stream. Every application that contains at least one IP Multicast stream becomes a network.

Every tap also carries a “tag” which is then used to link with Program Elements in the PMT. As the example in Figure 19.3 shows, two taps in the same application may point to the same Program Elements by using the same tags.

Both, the ATSC and cable environments define the same MAC Address List Descriptor as a method to expose the address associated with a multicast stream. In the case of cable, this descriptor is mandatory, however in ATSC the use of this descriptor is optional. And, when the descriptor is used in ATSC, it can be placed in the DST (although there is no prohibition to use it in the PMT), while when used in cable, it can be placed in the PMT.

In cable, the absence of a MAC Address List Descriptor in the PMT implies that any MAC address may appear in the signaled Program Elements and it is up to the receiver to monitor all relevant streams for interesting packets. The presence of a MAC address list descriptor in the PMT is used to signal the potential presence of a packet in the Program Element. Its use it to reduce the workload on the receiver. The same behavior applies to this descriptor in the terrestrial broadcast scenario, except that the descriptor is placed in the DST instead of the PMT.

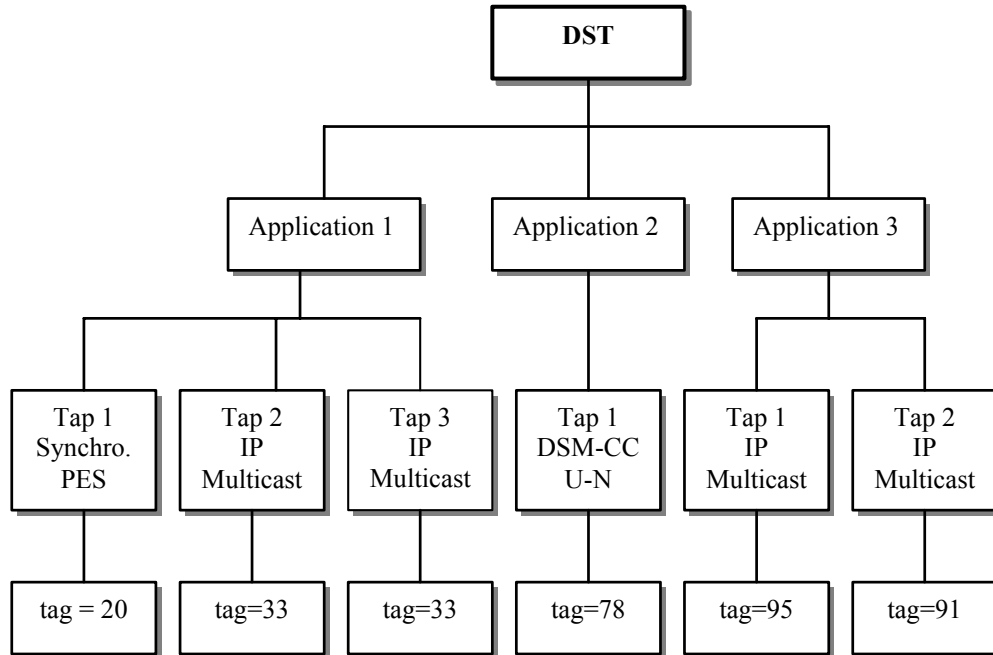


Figure 19.3 Example of a DST describing three applications, two of which carry IP Multicast streams. In this case, two networks exist in the same MPEG-2 program.