



***Society of Cable  
Telecommunications  
Engineers***

---

**ENGINEERING COMMITTEE  
Interface Practices Subcommittee**

---

**AMERICAN NATIONAL STANDARD**

**ANSI/SCTE 34 2010**

**Test Method for  
Cored Depth Verification**

## NOTICE

The Society of Cable Telecommunications Engineers (SCTE) Standards are intended to serve the public interest by providing specifications, test methods and procedures that promote uniformity of product, interchangeability and ultimately the long term reliability of broadband communications facilities. These documents shall not in any way preclude any member or nonmember of SCTE from manufacturing or selling products not conforming to such documents, nor shall the existence of such standards preclude their voluntary use by those other than SCTE members, whether used domestically or internationally.

SCTE assumes no obligations or liability whatsoever to any party who may adopt the Standards. Such adopting party assumes all risks associated with adoption of these Standards or Recommended Practices, and accepts full responsibility for any damage and/or claims arising from the adoption of such Standards or Recommended Practices.

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. SCTE shall not be responsible for identifying patents for which a license may be required or for conducting inquiries into the legal validity or scope of those patents that are brought to its attention.

Patent holders who believe that they hold patents which are essential to the implementation of this standard have been requested to provide information about those patents and any related licensing terms and conditions. Any such declarations made before or after publication of this document are available on the SCTE web site at <http://www.scte.org>.

All Rights Reserved

© Society of Cable Telecommunications Engineers, Inc. 2010  
140 Philips Road  
Exton, PA 19341

## Table of Contents

<b>1.0</b>	<b>Scope</b>	<b>1</b>
<b>2.0</b>	<b>Equipment</b>	<b>1</b>
<b>3.0</b>	<b>Test Samples</b>	<b>1</b>
<b>4.0</b>	<b>Measurement or Test Method</b>	<b>1</b>
	<b>Figure 1</b>	<b>1</b>
	<b>Picture 1</b>	<b>2</b>
	<b>Table 1</b>	<b>2</b>

## 1.0 SCOPE

The purpose of this test method is to determine the cored depth of Trunk, Feeder and Distribution Coaxial cable. The core depth is the internal measured distance between the dielectric foam and the square-cut end of the outer sheath. This test method will define the suggested method for core depth measurement.

## 2.0 EQUIPMENT

- 2.1. A Dial Caliper calibrated to read in at least 0.001 inch or 0.03 mm increments, a Mitutoyo 505-626 or equivalent.
- 2.2. A Coring Tool for the coaxial cable to be tested.

## 3.0 TEST SAMPLES

Two-foot sample of the cable to be tested. Both ends should be square-cut and free of burrs or other impediments. If jacketed, and a jacket stripping/coring tool combination is not used, the jacket should be removed a sufficient distance as recommended by the manufacture to not impede the coring tool's progress.

## 4.0 MEASUREMENT OR TEST METHOD

- 4.1. Use the coring tool recommended by the tool manufacturer that corresponds to the cable to be tested. Verify the tool so that it matches the cable sample by the cable size and corresponding part numbers along with the tool part number and manufacturer's recommendations.
- 4.2. Core the cable by following the coring tool manufacturer's specific directions found on their instruction sheets.
- 4.3. Ensure the dial caliper is calibrated, and reads zero in the closed position. Extend the caliper out until it is just longer than the expected core depth as seen in Figure 1. Insert the dial caliper measuring blade inside the cored cable until the blade gently contacts the dielectric and lightly push down until the calipers butt contacts the cable outer sheath. Record this value as core depth. Record three measurements 120 degrees apart and average. The average core depth must meet the connector manufacturer's specification for core depth.

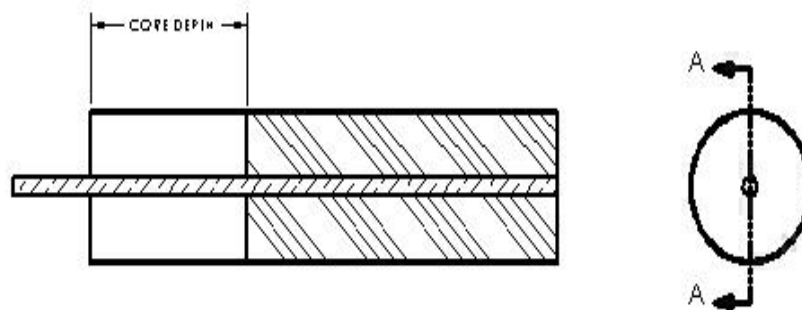


Fig. 1

Picture 1



**Table 1: Results of Core Depth Measurement**

Tester:	Date:
Cable Manufacturer:	
Cable Type/Size:	
Sample No.:	
Measurement 1:	
Measurement 2:	
Measurement 3:	
Average:	
$(M1+M2+M3)/3$	
Comments:	